



Automation for Sliding Gates

HUSKY 700/1000/1200

Easy Setup

User-friendly control board with torques for overcurrent and force adjustment

Guaranteed Quality

Solid structure with worm gear to enhance durability

Safe Operation

Open/close gates with precision through limit switch

Soft Star and Soft Close provide smooth operation and crash prevention

Smartphone Control

Remotely open and close doors with the Chow! app

Programming the motor through Chow! app

Extra home security and convenience with the Chow! Cam from anywhere and any device



Key Release



230V



Smartphone Control




Max.50 Remote




Auto Close




Application Diagram

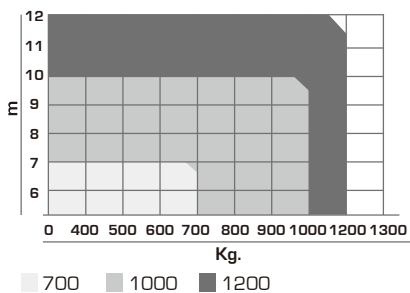

Dimensions

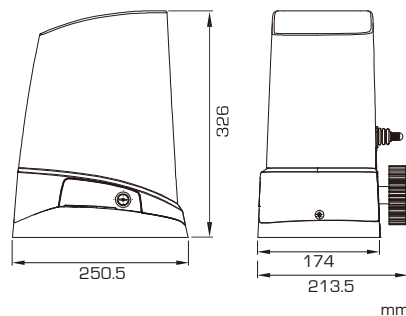

Basic Installation

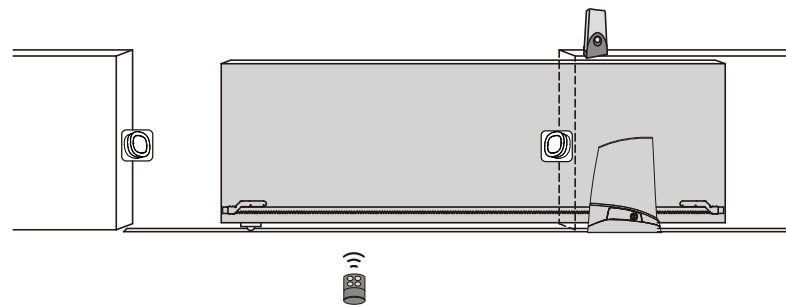

Model Name	HUSKY 700	HUSKY 1000	HUSKY 1200
Technical Feature	AC Sliding Gate Opener	AC Sliding Gate Opener	AC Sliding Gate Opener
Power Supply	AC230V 50Hz	AC230V 50Hz	AC230V 50Hz
Max Gate Length	7M	10M	12M
Max Gate Weight	700Kg	1000Kg	1200KG
Gear Type	Worm Gear	Worm Gear	Worm Gear
Peak Thrust	7000N	10000N	12000N
Gate Speed	19.78cm/s	19.78cm/s	19.78cm/s
Opening Time	< 17.7 sec	< 17.7 sec	< 27.3 sec
Duty Cycle	20%	20%	20%
Protection Grade (IP)/ Protection Class	IP 44	IP 44	IP 44
Working Temperature/ Operating Temperature	-20~50°C	-20~50°C	-20~50°C
Absorbed Current (A)	1.32A	1.85A	1.94A
Absorbed Power (W)	305W	420W	440W
Manual Release	Key	Key	Key
Enclosure Dimensions	250mm*174mm*323mm	250mm*174mm*323mm	250mm*174mm*323mm


Security System

Basic Access Kit



Gate Opener,
2x Transmitters, Chow! app

Smart Starter Kit



Gate Opener, 2x Transmitters, Chow! app, Chow Bell

Secure Pro Kit



Gate Opener, 2x Transmitters, Chow! app, Chow Bell, Chow Cam

Basic Access Kit (gate opener, transmitters 2 pcs, Chow App), Smart Starter Kit (gate opener, transmitters 2 pcs, Chow App, Chow Bell), Secure Pro Kit (gate opener, transmitters 2 pcs, Chow App, Chow Bell, Chow Cam).

