



ACCESSORIES



CB Series Control System

Smart Control with Intelligent Functions

- Power input 110VAC/230VAC are both available
- Two backup batteries for power failure
- Built-in radio receiver to match transmitters
- Over-current design which comply with European safety regulation
- Elegant design with easy installation



P1 Wireless Keypad

- 433.92MHz frequency
- Requires 2 AAA batteries
- 50m transmission distance
- 2 transmission channels to control multi automated accesses
- Unique PIN codes for temporary use



FL2 Flashing Light

Flashing Light Powered with 24VDC

- Unique wall lightbox design which maximises light efficiency
- Halogen bulb provides excellent illumination
- Vertical and horizontal installations are both available



H2 Photocell

Photocell of Receiver/Transmitter

- Safety device for up to 15m sensing range
- Power input of AC/DC 12 ~ 24V
- Waterproof design for outdoor environments



TM3 Transmitter

4-Channel Remote

- Four-channel transmitter with programmable features
- Up to 50m transmitting distance
- With rolling code of 433MHz



Nylon Gear Rack

(For Sliding Motor)

- Dimension 1000 x 26.7 x 19.7mm



Photocells / Reflector Type

- Sensing range up to 7m/12m
- Input voltage DC 10-30 V
- Waterproof IP 65
- Dimension 58 x 58 x 20mm



Chow Bell

Smart Wireless Doorbell

- RC2032 battery in push button
- 1.5A AAA batteries 3pcs in receiver (Not Included)
- IP 44 waterproof
- 52 kinds of ringtones
- 4-level adjustable volume
- 450 feet operation range in an open area
- Easy installation and operation



Chow Cam

Outdoor IP Cam

- IP 66 waterproof
- 1280 x 720 pixels
- 0°C ~ 55°C operating temperature
- Supports up to 128GB SD card (Not Included)



Electric Latch

(For Swing Motor)

- Input voltage DC 24V
- Dimension 74 x 61 x 120mm

NEW!



Wireless Keybutton (Indoor)

- Transmitting distance up to 50m
- 4 Channel for programming
- Battery A23 12V 1pce
- Dimension 70 x 120 x 14mm



Metal Stopper

(For Swing Motor)

- Dimension 130 x 130 x 35mm

Never Have to Worry about Power Failure



Backup Battery Set (For Sliding Motor)

[12V/1.3A *2pcs]


- Dimension 98 x 44 x 58mm



Backup Battery Set (For Swing Motor)

[12V/2.2A *2pcs]

- Dimension 70 x 47 x 103mm

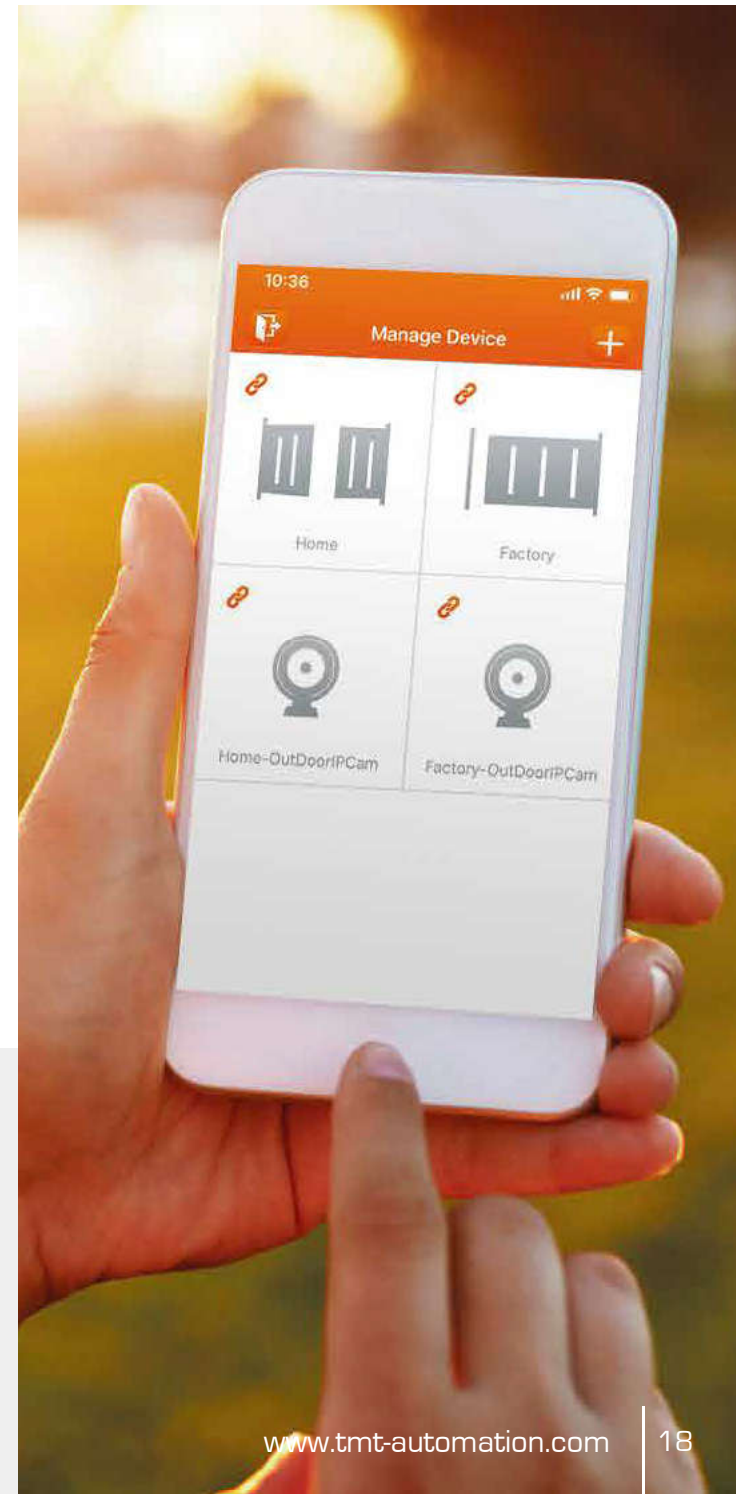

14F., No.14, Ln. 15, Sec. 6, Xinyi Rd.,
Xinyi Dist., Taipei City 110, Taiwan (R.O.C.)
Tel: +886-2-2219-0785
Email: sales@tmt-automation.com
Website: www.tmt-automation.com



TMT Chow ! APP



TMT Website

