



Automation for Swing Gates TERRIER 150/200



Economical Choice For Light/Medium Weight Gates

Corrosion resistant treatment for metal surfaces allow motors to handle extreme weather
Strong structure with durable materials supports intensive use

Easy Manual Release


Gates are able to be released effortlessly with a personal key in the case of power failure.

Smartphone Control

Remotely open and close doors with the Chow! app
Programming the motor through Chow! app
Extra home security and convenience with the Chow! Cam from anywhere and any device




Application Diagram

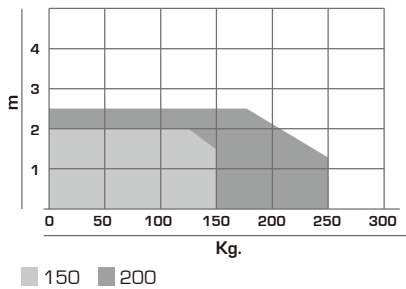


Dimensions


TERRIER150

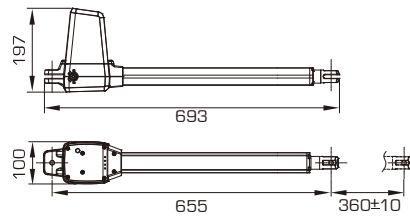

TERRIER200

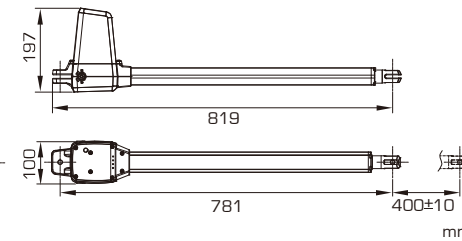

Basic Installation

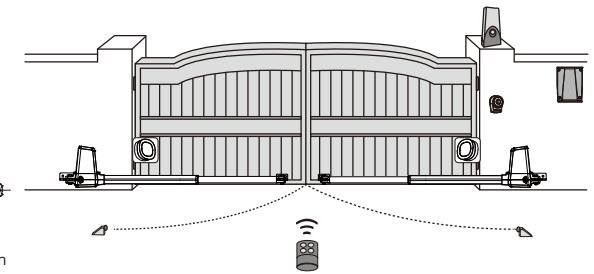

Model Name	TERRIER 150	TERRIER 200
Technical Feature	Swing Gate Opener	Swing Gate Opener
Max Gate Length	2M	2.5M
Max Gate Weight	150Kg	200Kg
Power Supply	110-240VAC (50-60Hz)	110-240VAC (50-60Hz)
Motor Power Supply	24VDC	24VDC
Motor Spec No.	4734	4734
RPM	3800RPM	3800RPM
Gear Type	Worm Gear	Worm Gear
Peak Thrust	2000N	2500N
Operation Stroke	360mm	400mm
Piston Extension	28.9mm/sec	28.9mm/sec
Opening Time	<13 sec	<14 sec
Duty Cycle	20%	20%
Protection Grade (IP)/ Protection Class	IP44	IP44
Working Temperature/ Operating Temperature	-20~50°C	-20~50°C
Absorbed Current (A)	4.2A	4.2A
Absorbed Power (W)	100W	100W
Manual Release	Key	Key
Enclosure Dimensions	698mm * 100mm * 197mm	819mm * 100mm * 197mm


Security System

Basic Access Kit




Gate Opener,
2x Transmitters, Chow! app

Smart Starter Kit



Gate Opener, 2x Transmitters, Chow! app, Chow Bell

Secure Pro Kit

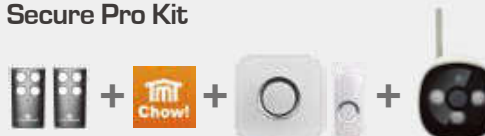

Gate Opener, 2x Transmitters, Chow! app, Chow Bell, Chow Cam

Basic Access Kit (gate opener, transmitters 2 pcs, Chow App). Smart Starter Kit (gate opener, transmitters 2 pcs, Chow App, Chow Bell). Secure Pro Kit (gate opener, transmitters 2 pcs, Chow App, Chow Bell, Chow Cam).

